



High Quality Stainless Steel Turnbuckles/Rigging Screws

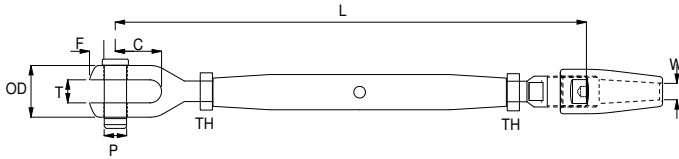

Marine Rigging Screws - Compression Stud and Fork

Product Code	Thread	W	P	C	F	T	OD	MIN L	MAX L	WEIGHT
RSCF03	1/4" unf	3mm	6mm	13mm	7mm	6.3mm	14.3mm	130mm	195mm	75g
RSCF04	5/16" unf	4mm	8mm	16mm	9mm	8mm	18.0mm	150mm	225mm	147g
RSCF05	3/8" unf	5mm	9.5mm	19mm	11mm	10mm	22.2mm	190mm	285mm	256g
RSCF06	7/16" unf	6mm	11mm	22mm	12mm	11mm	25.4mm	210mm	310mm	386g
RSCF07	1/2" unf	7mm	12mm	25mm	15mm	12.7mm	28.6mm	250mm	375mm	596g
RSCF08DS	1/2" unf	8mm	12mm	25mm	15mm	12.7mm	28.6mm	255mm	380mm	694g
RSCF08	5/8" unf	8mm	14.3mm	28mm	16mm	14mm	34.1mm	315mm	460mm	1222g
RSCF10	5/8" unf	10mm	16mm	32mm	18mm	16mm	38.0mm	330mm	475mm	1420g
RSCF12	3/4" unf	12mm	19mm	38mm	22mm	19mm	47.6mm	385mm	545mm	2434g
RSCF14	7/8" unf	14mm	22mm	45mm	26mm	22.2mm	54.0mm	430mm	615mm	3691g
RSCF16	1" unf	16mm	25.4mm	50mm	29mm	25.4mm	63.5mm	520mm	730mm	5322g
RSCF19	1 1/8" unf	19mm	28mm	58mm	32mm	28.6mm	69.9mm	560mm	820mm	5573g
RSCF22	1 1/4" unf	22mm	32mm	64mm	38mm	32mm	76.2mm	605mm	875mm	8201g
RSCF26	1 3/8" unf	26mm	35mm	70mm	42mm	35mm	82.5mm	700mm	1015mm	16042g

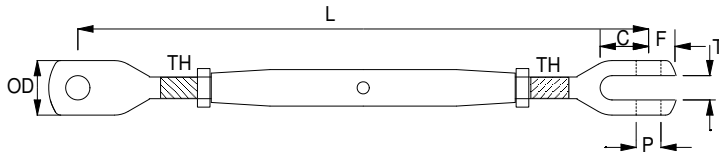

Marine Rigging Screws - Fork and Fork

Product Code	Thread	W	P	C	F	T	OD	MIN L	MAX L	WEIGHT
RSFF03	1/4" unf	3mm	6mm	13mm	7mm	6.3mm	14.3mm	135mm	205mm	80g
RSFF04	5/16" unf	4mm	8mm	16mm	9mm	8mm	18.0mm	165mm	240mm	170g
RSFF05	3/8" unf	5mm	9.5mm	19mm	11mm	10mm	22.2mm	200mm	300mm	282g
RSFF06	7/16" unf	6mm	11mm	22mm	12mm	11mm	25.4mm	220mm	330mm	398g
RSFF07	1/2" unf	7mm	12mm	25mm	15mm	12.7mm	28.6mm	260mm	390mm	614g
RSFF08	5/8" unf	8mm	14.3mm	28mm	16mm	14mm	34.1mm	325mm	480mm	1260g
RSFF10	5/8" unf	10mm	16mm	32mm	18mm	16mm	38.0mm	345mm	500mm	1434g
RSFF12	3/4" unf	12mm	19mm	38mm	22mm	19mm	47.6mm	400mm	570mm	2418g
RSFF14	7/8" unf	14mm	22mm	45mm	26mm	22.2mm	54.0mm	450mm	640mm	3577g
RSFF16	1" unf	16mm	25.4mm	50mm	29mm	25.4mm	63.5mm	520mm	760mm	5340g
RSFF19	1 1/8" unf	19mm	28mm	58mm	32mm	28.6mm	69.9mm	585mm	855mm	5618g
RSFF22	1 1/4" unf	22mm	32mm	64mm	38mm	32mm	76.2mm	635mm	920mm	7711g
RSFF26	1 3/8" unf	26mm	35mm	70mm	42mm	35mm	82.5mm	715mm	1040mm	14085g

PRODUCT BENEFITS

Generously proportioned toggle straps are designed to take the full wire breaking load on each side of the eye and pin, avoiding premature failure due to transient unbalanced loads.

Stainless Steel 316 body with aluminium bronze inserts for sizes 8mm to 26mm.

All bodies have aluminium bronze threads ensuring **No Thread Seizing**.