

TURNBUCKLES

Closed Body with Stud and Stud

Benefits


Stainless steel grade 316 closed body with Aluminium Bronze thread inserts for sizes 8mm to 26mm.

Eyes are manufactured to a very high standard using the latest technology in electrical upsetting forging.

All raw materials used to manufacture these parts are certified to EN10204 3.1b.

Inspection certificate BS EN 10204 3.1B available on request (This must be specified at the time of order).

High quality finish and excellent polish.

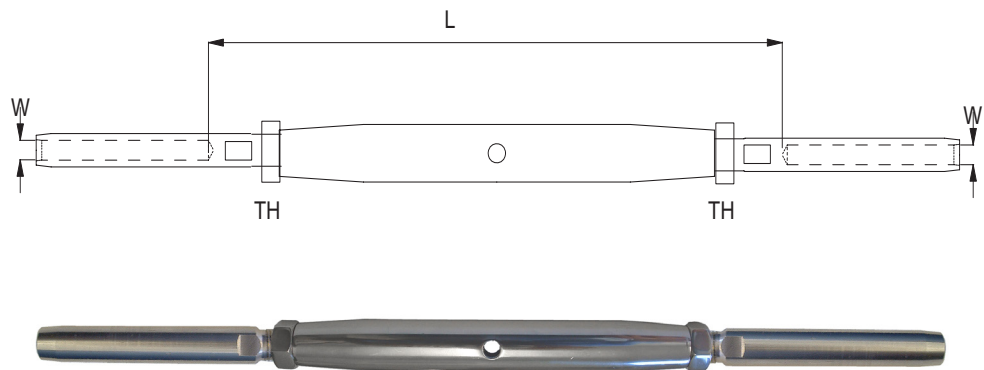

Turnbuckle with swage stud and swage stud					
Product Code	Wire	Thread	Min L	Max L	Weight
RSS03	3mm	1/4" unf	116mm	186mm	70g
RSS04DS	4mm	1/4" unf	118mm	188mm	72g
RSS04	4mm	5/16" unf	136mm	214mm	112g
RSS04US	4mm	3/8" unf	167mm	267mm	118g
RSS05DS	5mm	5/16" unf	142mm	220mm	124g
RSS05	5mm	3/8" unf	167mm	267mm	200g
RSS05US	5mm	7/16" unf	178mm	286mm	207g
RSS06DS	6mm	3/8" unf	173mm	273mm	213g
RSS06	6mm	7/16" unf	182mm	290mm	330g
RSS06US	6mm	1/2" unf	214mm	346mm	412g
RSS07	7mm	1/2" unf	214mm	346mm	504g
RSS08DS	8mm	1/2" unf	220mm	352mm	572g
RSS08	8mm	5/8" unf	274mm	430mm	1010g
RSS10	10mm	5/8" unf	278mm	434mm	1102g
RSS10US	10mm	3/4" unf	319mm	490mm	1435g
RSS11	11mm	3/4" unf	319mm	490mm	1435g
RSS12	12mm	3/4" unf	322mm	493mm	1766g
RSS14	14mm	7/8" unf	362mm	559mm	2795g
RSS16	16mm	1" unf	426mm	665mm	3914g
RSS19	19mm	1 1/8" unf	476mm	746mm	4230g
RSS22	22mm	1 1/4" unf	516mm	800mm	6611g
RSS26	26mm	1 3/8" unf	594mm	918mm	12649g

Other end fittings available include forks, swage studs, toggles and shackle toggles

All Hi-MOD products are produced to a high degree of quality control, using modern lean manufacturing processes, resulting in a reliable and consistent product